
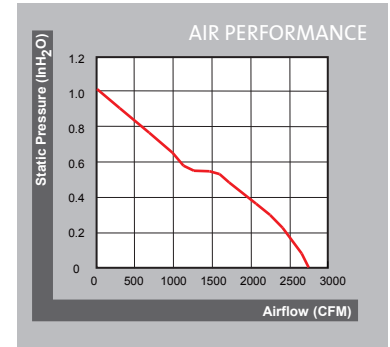


## FAN TRAY | 12 pcs axial fan

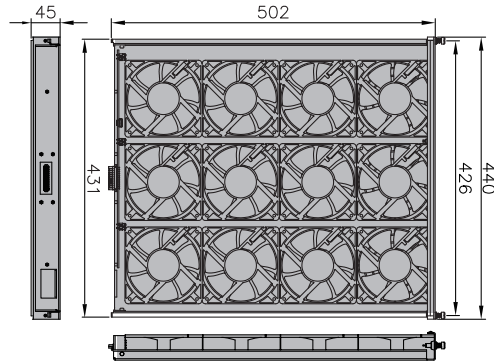

Model	Rating Voltage (VDC)	Rating Current (Amp)	Power Consumption (Watt)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H <sub>2</sub> O)	Noise (dBA)
12 FAN TYPE FD12112-XXXX	12	36	432	6000	2750	1.02	40.0

● Specifications are subject to change without notice. Specifications in this catalog are for reference. For more product information, please contact your SUNON sales representative.

### Fan Tray Features

- Communication : I<sup>2</sup>C interface
- EMC
- Advantage :
  - \*Soft Start.
  - \*Hot Swappable Function.
  - \*Reverse Polarity Protection.
  - \*Over Voltage Protection.
  - \*Inrush Current Protection.
  - \*Over Current Protection.
  - \*Linear or Step Speed Change.
- \*Control Fan Speed with Ambient Temperature.
- \*PWM or Voltage Speed Control.
- \*Redundancy Function.
- \*LED Display Fan Tray Health Status.
- \*EEPROM for e-ID.
- \*Thermal Sensor Fail and Fan Fail Alarm Signal Output.

### Sunon Fan Tray Capability

- ODM & OEM Design
- Industry/ Telecom (Indoor & outdoor) & Networking and other application
- CAE Capability to Optimal System Cooling Design
- Widely Applicative Fan : 12V / 24V / 48V / 72V
- 100% Burn In Testing & Monitor Equipment
- Flexible Manufacture
- Communication : I<sup>2</sup>C interface
- Traceability
- 100% Auto Function Testing
- Safety Compliance : UL/CUL/TUV/VDE/CE